



Special features

- For general purpose
- Strain gauge measuring system
- Tension / Compression
- Made of high-grade stainless steel or aluminium
- Small dimensions


Specifications

Rated capacity (F _n)	0.1, 0.2, 0.5	1, 2, 5	kN
Overload			
- Safe	130		% F _n
- Ultimate	150		% F _n
- Permanent static load ¹	75		% F _n
- Dynamic load ¹	50		% F _n
Nominal sensitivity (C _n)	1.0 ± 2 %	1.5 ± 2 %	mV/V
Zero balance	2		% F.S.
Max error			
Non-linearity	0.25		% F.S.
Hysteresis	0.25		% F.S.
Creep (30 min)	0.1		% F.S.
Temperature effect			
- On zero	0.1		% F.S./10 °C
- On output	0.1		% F.S./10 °C
Bridge resistance			
- Input	395 ± 10 %	380 ± 10 %	Ω
- Output	350 ± 5 %	350 ± 5 %	Ω
Insulation Impedance	> 500		MΩ
Excitation ²			
- Recommended	5 ... 7	7 ... 10	V
- Maximal	10	15	V
Temperature range			
- Compensated	0 ... + 50		°C
- Operating	- 10 ... + 70		°C
Protection	IP54		
Construction	Aluminium	Steel	
Cable			
- Type	LifYDY 4 x 0.05		
- Length	2		m

Notes:


- 1 Recommended value
- 2 DC or AC Voltage

Outline dimensions

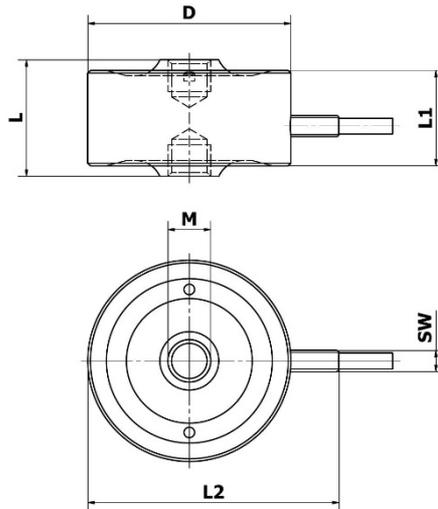

Rated capacity F_n (kN)	D mm	M mm	L mm	L1 mm	L2 mm	SW mm	Mass kg	Deflection, @ F_n (μm)
0.1, 0.2, 0.5	34	M6	18	14	44	Φ 4	0.05	40
1, 2, 5	38	M8	22	18	48	Φ 4	0.13	45

Recommended installation

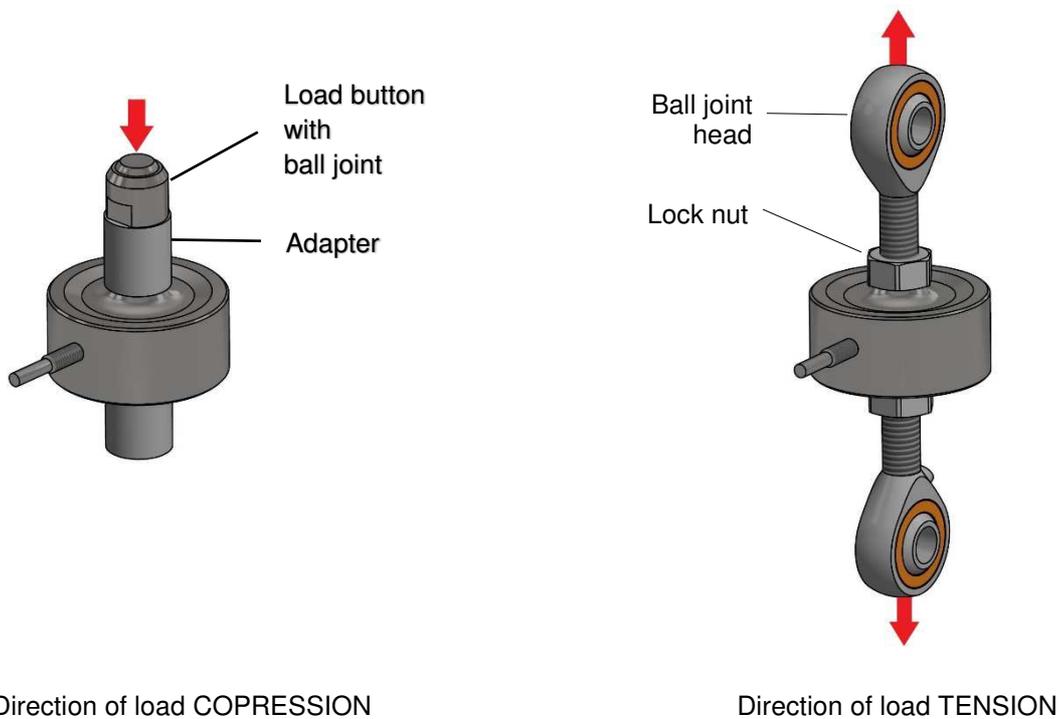


Direction of load COPRESSION

Direction of load TENSION


Installation notes:

- The force must only act in the axis of the sensor.
- The sensor must be built in such a way that the force acts only through the threads. Adapter or the ball joint head must not touch the sensor body itself.

Sensor wiring colour code

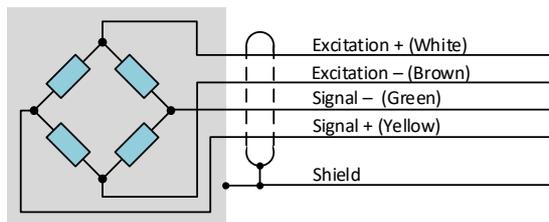


Sensor output characteristic

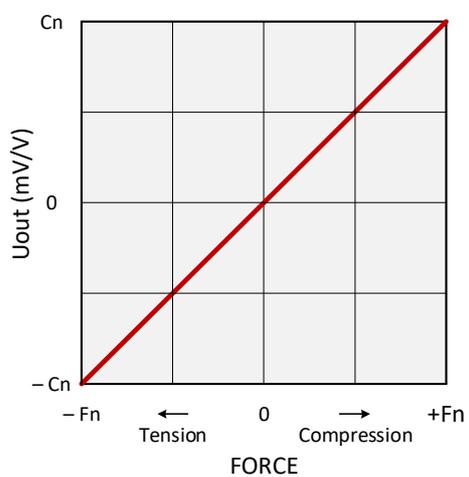


Wiring diagram, connection example to EMS169 signal conditioner

1. Load direction COMPRESSION, signal conditioner output positive (0 ... 10 V, 4 ... 20 mA)


Wiring diagram

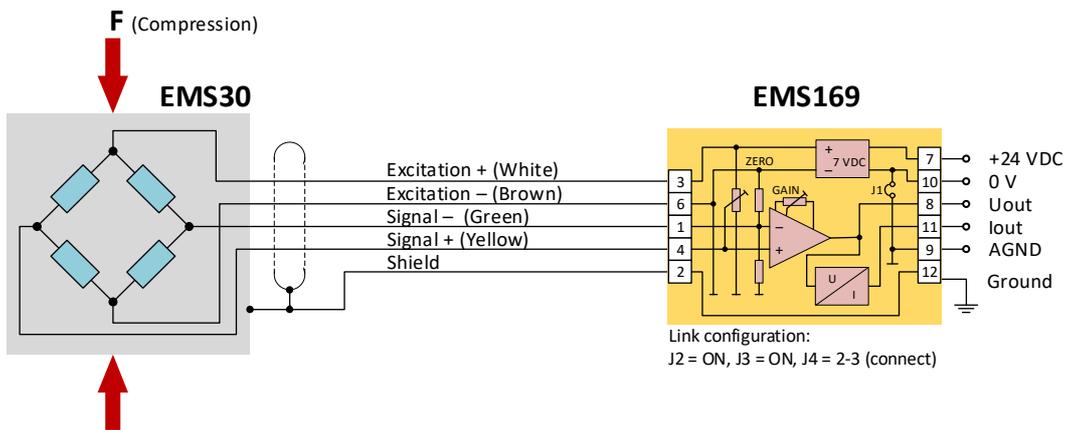

Output characteristics

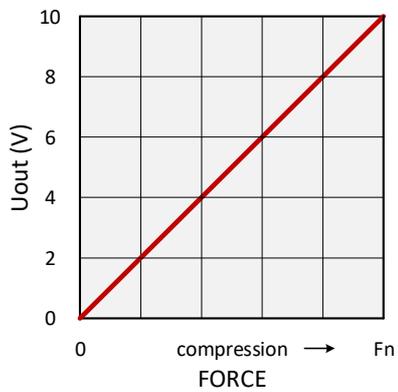


Uout vs. F

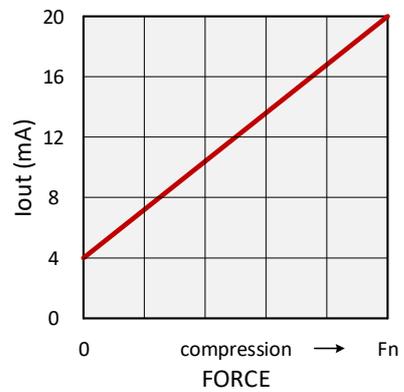


Iout vs. F

2. Load direction TENSION, signal conditioner output positive (0 ... 10 V, 4 ... 20 mA)


Wiring diagram

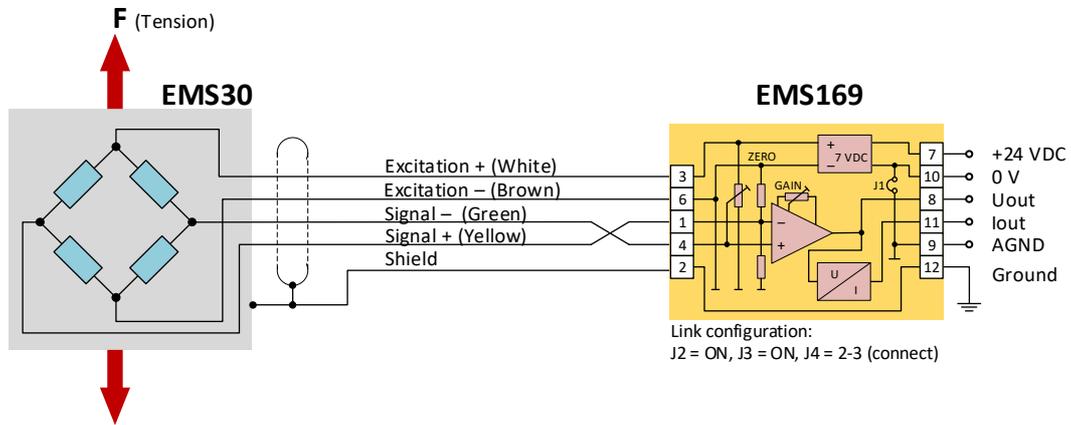

Output characteristics

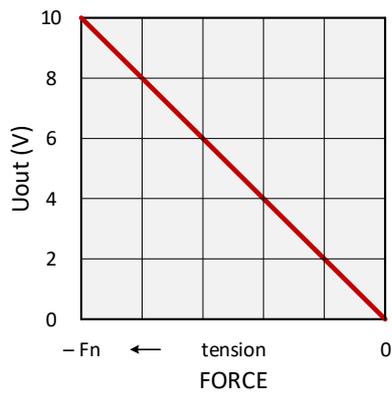

Uout vs. F

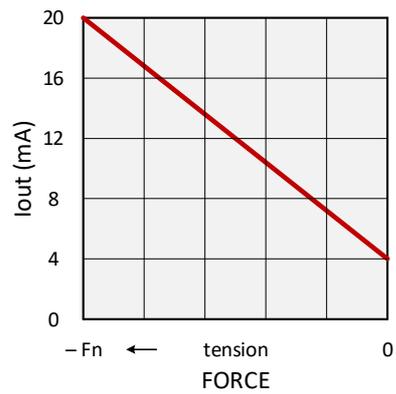


Iout vs. F


3. Load direction **COMPRESSION** and **TENSION**, signal conditioner output bipolar (± 10 V)

Note: The current output does not work in the negative range.

Wiring diagram

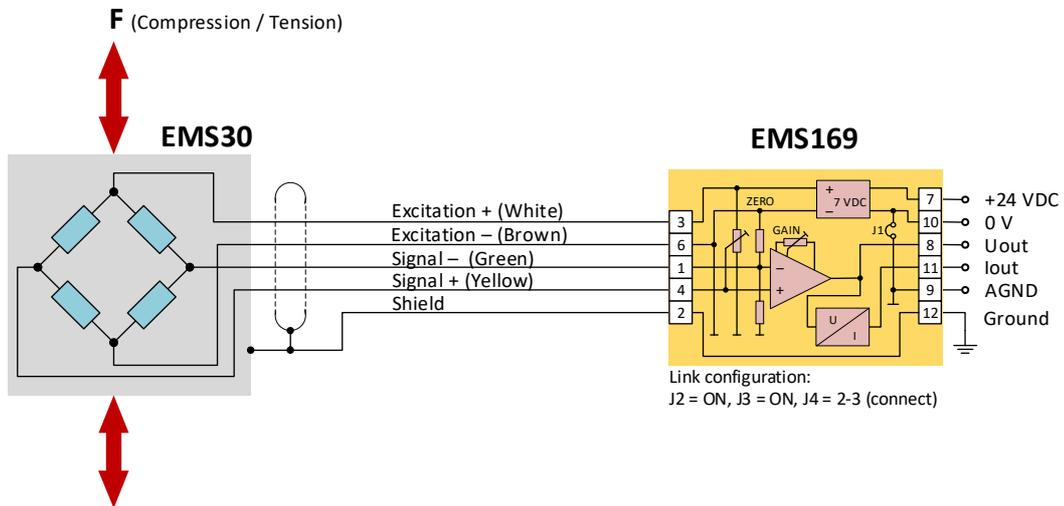


Output characteristic

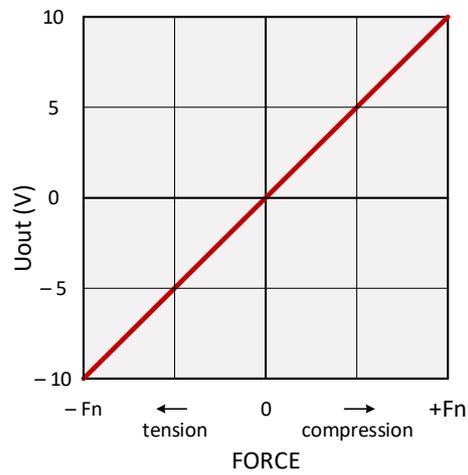


Uout vs. F

4. Load direction **COMPRESSION** and **TENSION**, signal conditioner output positive
(5 ± 5 V, 12 ± 8 mA)


Wiring diagram

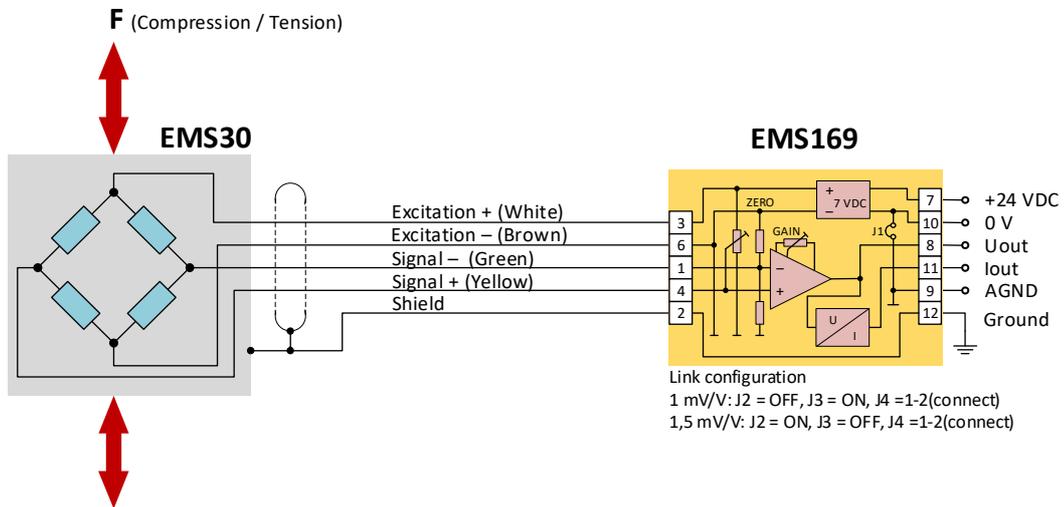

Output characteristics

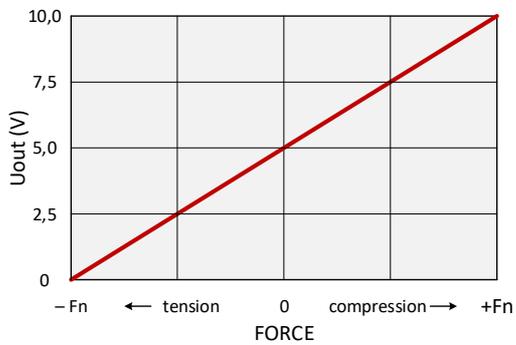


Uout vs. F

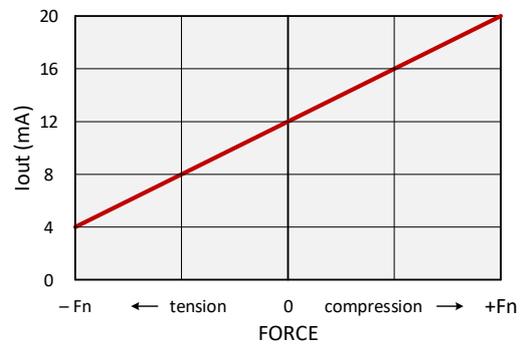

Iout vs. F

Parallel wiring diagram

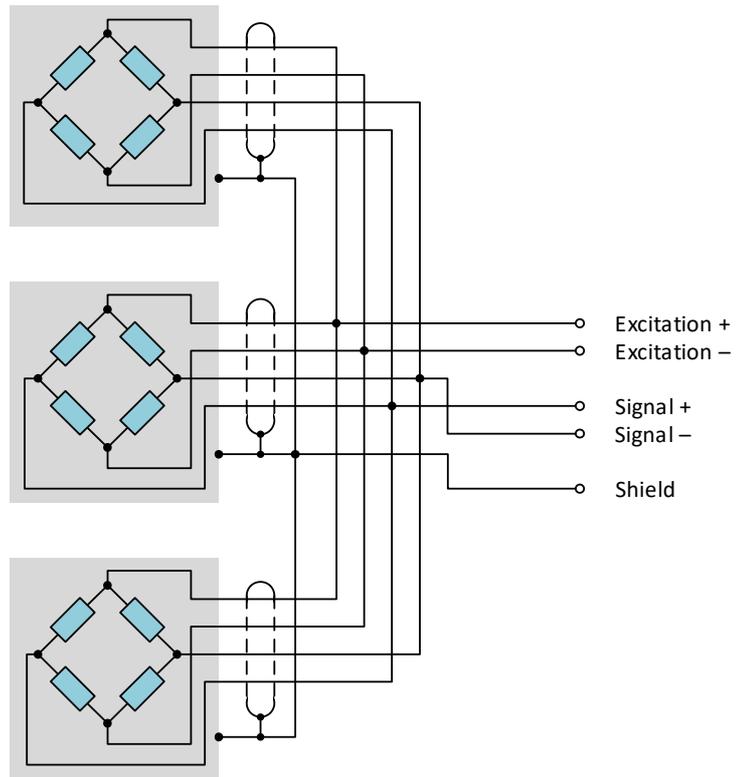

Legal information

The company EMSYST, spol. s r. o., registered office: Súvoz 111, 911 01 Trenčín, ID No.: 34 115 749, VAT No.: SK2020386115, registered in the Commercial Register maintained by the District Court Trenčín, section: Sro, file No.: 502/R (hereinafter referred to as the "Company"), hereby informs that any texts, descriptions, information, graphic and technical data contained in this document are subject to Company's copyright in accordance with the provisions of Act no. 185/2015 Coll. Author's of the Act, as amended. These materials are intended for customers of the Company and it is not possible to copy, modify or reproduce it without previous written consent of the Company.

The company further informs that any information that has been made available for customers, resulting from this document (primarily prices, technical know-how, or other special specification), relating to the Company's products and processes are the subject of a special trade secret of the Company and are subject to legal protection resulting from the provisions of § 17 et seq. Act No. 513/91 Coll. Commercial Code as amended.